

## CSE 486/586 Distributed Systems Concurrency Control --- 3

Steve Ko  
Computer Sciences and Engineering  
University at Buffalo

CSE 486/586

## Recap

- Strict execution of transactions?
  - *Delay both their read and write operations* on an object until all transactions that previously wrote that object have either committed or aborted
- Two phase locking?
  - Growing phase
  - Shrinking phase
- Strict two phase locking?
  - Release locks only at either commit() or abort()

CSE 486/586

2

## CSE 486/586 Administrivia


- PA3 deadline: 4/8 (Friday)
- PA2-B & Midterm grades on UBLearn
- I will post midterm (letter) grades to show you where you are at this point.

CSE 486/586

3

## Distributed Transactions

- Transactions that invoke operations at multiple servers

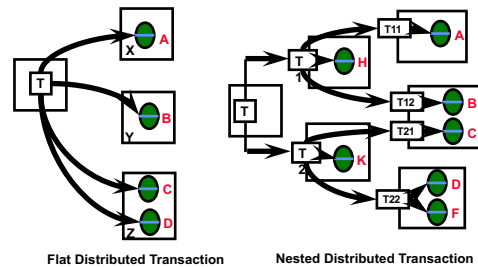


CSE 486/586

4

## Coordinator and Participants

- Coordinator
  - In charge of begin, commit, and abort
- Participants
  - Server processes that handle local operations




Coordinator & Participants

CSE 486/586

5

## Example of Distributed Transactions

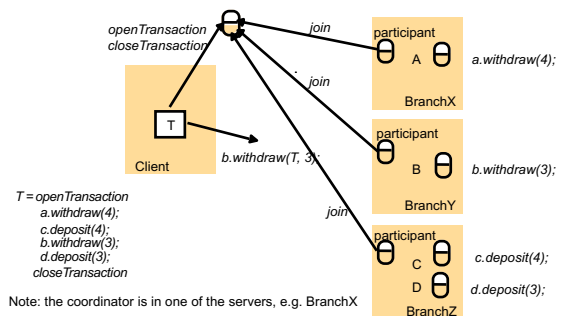

Note: the coordinator is in one of the servers, e.g. BranchX

CSE 486/586

6

## Atomic Commit Problem

- Atomicity principle requires that either all the distributed operations of a transaction complete, or all abort.
- At some stage, client executes commit(). Now, atomicity requires that either *all* participants (remember these are on the server side) and the coordinator commit or *all* abort.
- What problem statement is this?
  - Consensus
- Failure model
  - Arbitrary message delay & loss
  - Crash-recovery with persistent storage

CSE 486/586

7

## Atomic Commit

- We need to ensure *safety* in real-life implementation.
  - Never have some agreeing to commit, and others agreeing to abort.
- First cut: one-phase commit protocol. The coordinator communicates either commit or abort, to all participants until all acknowledge.
- What can go wrong?
  - Does not allow participant to abort the transaction, e.g., under deadlock.
  - Doesn't work well with failures (e.g., when a participant crashes before receiving this message). Need to have some extra mechanism.

CSE 486/586

8

## Two-Phase Commit (Handling Abort)


- First phase
  - Coordinator collects a *vote* (commit or abort) from each participant (which stores partial results in permanent storage before voting).
- Second phase
  - If all participants want to commit, coordinator multicasts commit message
  - If any participant has aborted, coordinator multicasts abort message to all participants

CSE 486/586

9

## Two-Phase Commit

- Communication

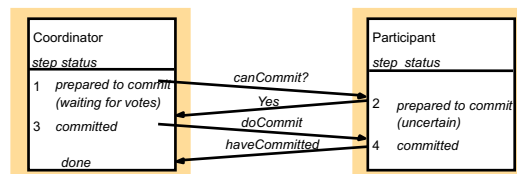

CSE 486/586

10

## Dealing with Failures

- To deal with server crashes
  - Each participant saves tentative updates into permanent storage, right before replying yes/no in first phase. Retrievable after crash recovery.
- To deal with canCommit? loss
  - The participant may decide to abort unilaterally after a timeout (coordinator will eventually abort)
- To deal with Yes/No loss, the coordinator aborts the transaction after a timeout (pessimistic). It must announce doAbort to those who sent in their votes.
- To deal with doCommit loss
  - The participant may wait for a timeout, send a getDecision request (retries until reply received) – cannot abort after having voted Yes but before receiving doCommit/doAbort!

CSE 486/586

11

## Problems with 2PC

- It's a blocking protocol.
- Scalability & availability issues

CSE 486/586

12

## Summary

- Increasing concurrency
  - Non-exclusive locks
  - Two-version locks
  - Hierarchical locks
- Distributed transactions
  - One-phase commit cannot handle failures & abort well
  - Two-phase commit mitigates the problems of one-phase commit
  - Two-phase commit has its own limitation: blocking

CSE 486/586

13

## Acknowledgements

- These slides contain material developed and copyrighted by Indranil Gupta (UIUC).

CSE 486/586

14